




PRIO TECHNOLOGY

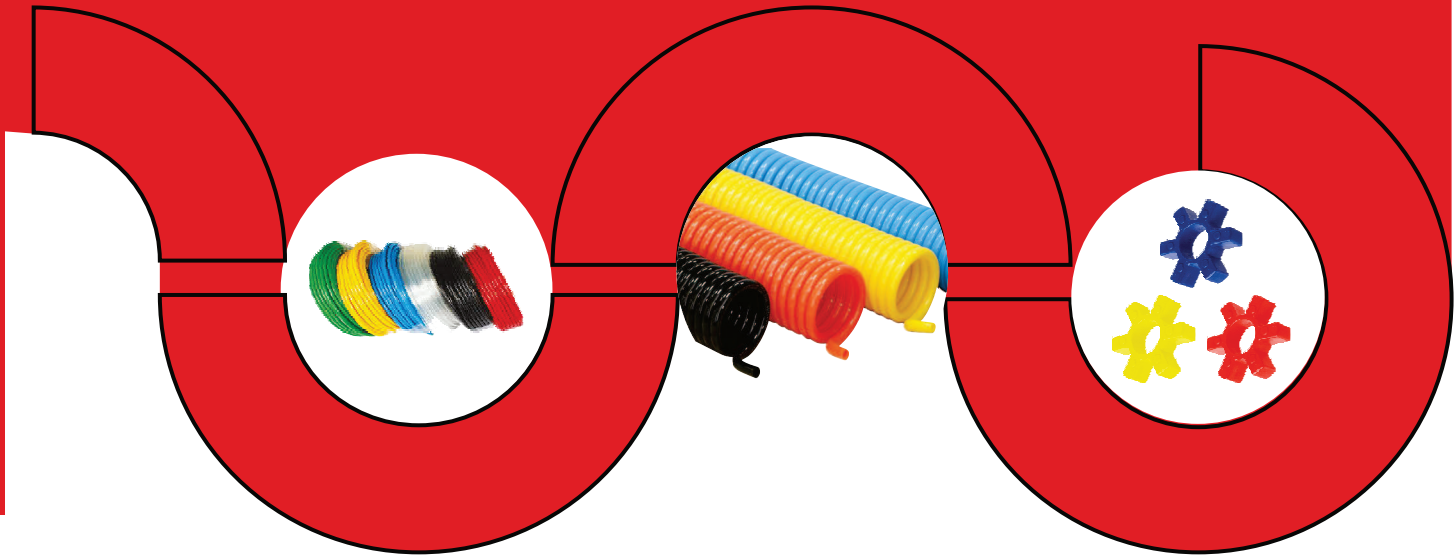

MFG :

PU Tube

PU Re-coiled

PU Cords

PU Spider

PU Seals

We start our new wing to manufacture Polyurethane PU Tubes, PU Recoiled Hoses, PU Cords, PU Spider / Star for transmission coupling, PU Seals & other as per required extruder & injection PU product are available. We are the prominent and distinguished manufacturer of these products under the brand "PRIO".

QUALITY POLICY

Our PU products are made from Virgin and Food grain Polyurethane material. Consisting Strength, Durability and Innovation are the hallmark of our brand "PRIO". Our priority is to customer satisfaction therefore we are very caution about product quality with continuous updating technical competence and services.

PRODUCTS

PU TUBE



FEATURES

- Excellent resistance to Oil, Grease, Aliphatic Hydrocarbons, Oxygen and Ozone.
- Flexibility of PU tube is good under very low temperature.
- Inner wall of PU tube is very smooth for transportation of air.
- PU tube is much lighter than rubber.
- Available in multi colors for easy identification.
- In built meter marking for ready measure.
- Operating temperature : 30°C - 70°C.
- Transparent tube is with high grade of transparency so easy to see flowing medium.
- The color tube has weather resistance pigment, the color is standard, bright, and with good fastness after long-time usage.
- Sizes are available from 4mm OD TO 16mm OD

APPLICATIONS

- Printing and Packaging Machines
- Food and Beverage Processing Machines
- Wood Processing Machines
- Paper Processing Machines
- Automobile Equipments
- Pneumatic Tools and Assembly Compressor and Connection



PU RE COILED HOSE



FEATURES


- Flexible Space saving.
- Standard linear length : 3Mtr, 5Mtr, 10Mtr, 15Mtr, 25Mtr.
- Possess excellent memory and flexibility.
- Working pressure up to 10-12 kg / CM².
- Excellent resistance to Oil, Grease, Aliphatic Hydrocarbons, Oxygen and Ozone.
- Flexibility of PU tube is good under very low temperature.
- Inner wall of PU tube is very smooth for transportation of air.
- PU tube is much lighter than rubber.
- Operating temperature : 30°C - 70°C.
- Using the online diameter control system, the tube diameter tolerance is controlled within 0.2mm

PU CORDS, PU STAR, PU SEALS

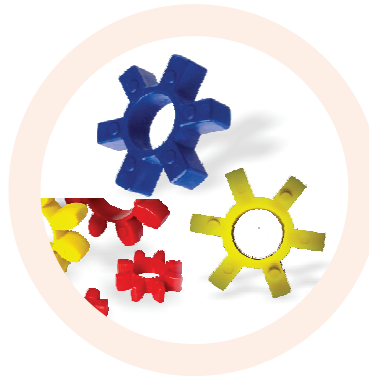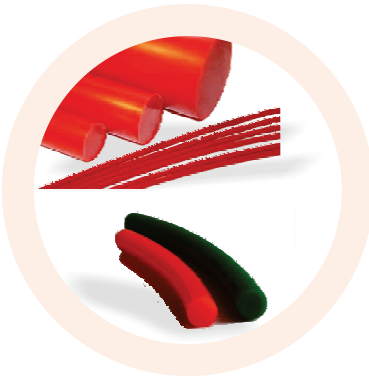

FEATURES

- Flexible and Vibration reducing
 - Exact Dimensions
 - Light Weight
 - Excellent Texture
 - Maintenance free, easy to inspect visually
 - Axial plug-in, easy assembly
 - Long lasting
 - Ruggedness and corrosion resistance
- Sizes For Cords are available from 4mm OD TO 16mm OD

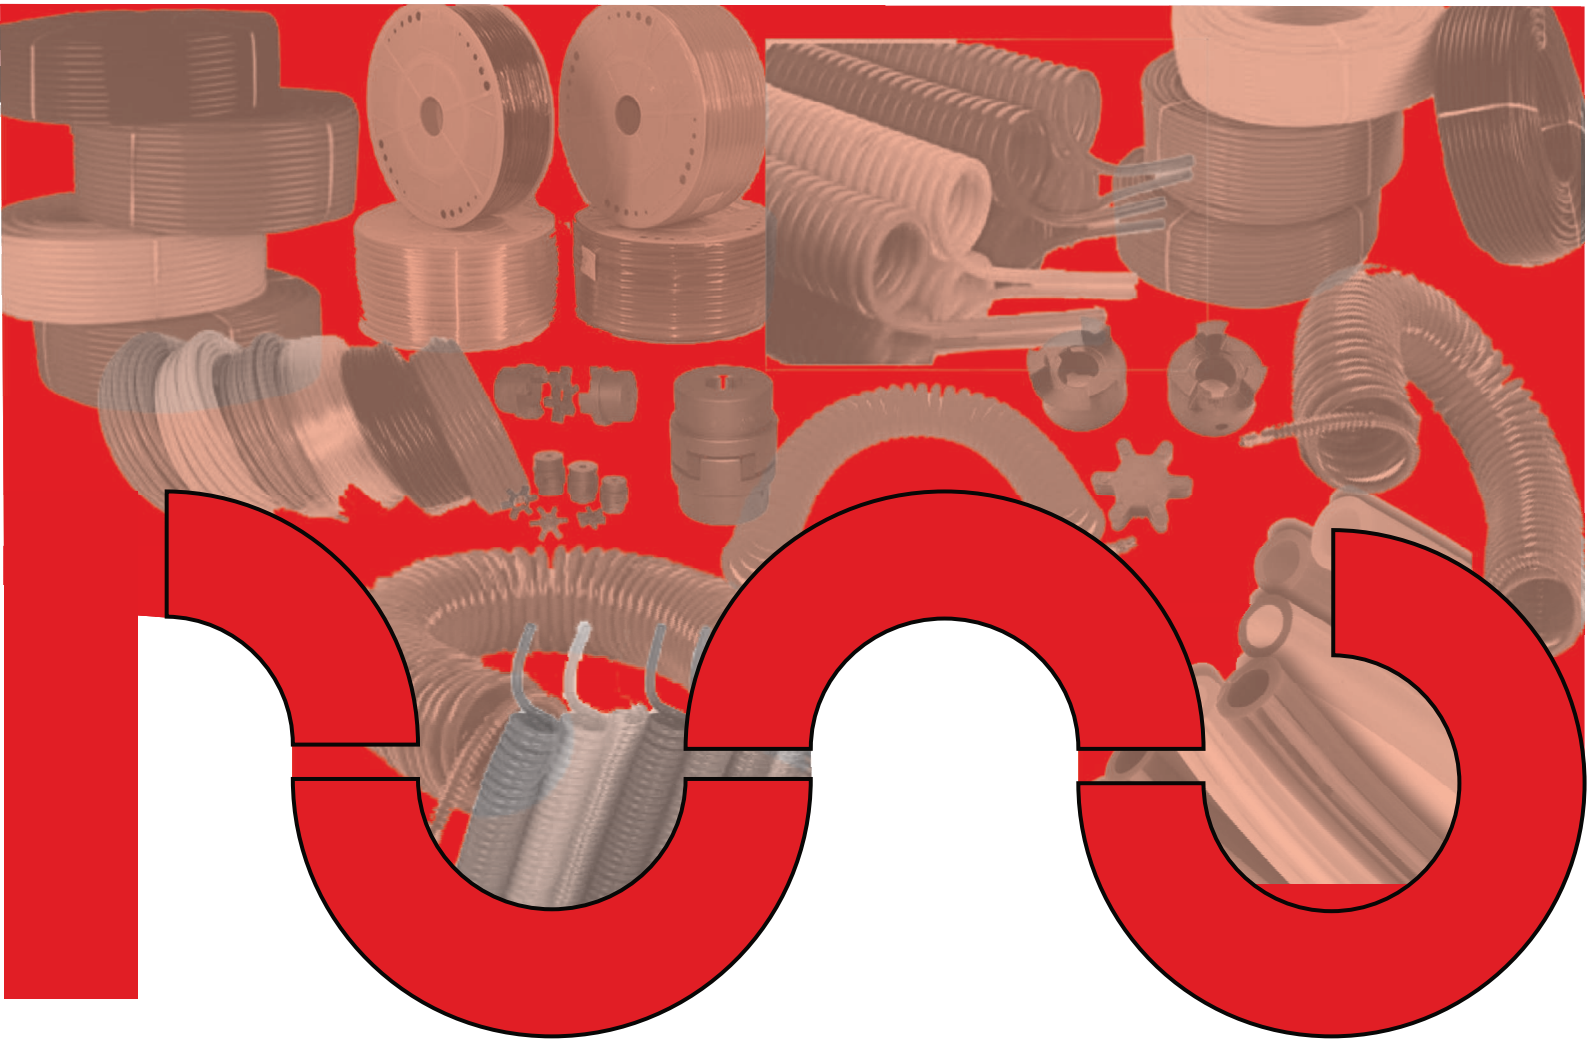

एक कदम स्वच्छता की ओर

10, Kameswar Estate, Plot No. - 3609, Ph-4, GIDC,
Vatva, Ahmedabad-382 445 Gujarat. (INDIA)

Contact No. : +91-79 2584 1150, 2584 1151

+91 96248 18999, 96246 38888

E-mail : prio@prio.co.in

Website : www.prio.co.in